

# HARDSCAPES



**ALLIANCE**  
OUTDOOR LIGHTING

GL100  
GL100-bt



GL150  
GL150-bt



GL160  
GL160-bt



GL170  
GL170-bt



GL180  
GL180-bt



GL190  
GL190-bt



GL300  
GL300-bt



GL310  
GL310-bt



GL350  
GL350-bt



GL360  
GL360-bt



GL370  
GL370-bt



GL380  
GL380-bt



GL390  
GL390-bt



SL50  
SL50-bt



SL60  
SL60-bt



SL100



SL150



SL200  
SL25-LED  
SL25-bt



SL300  
SL35-LED  
SL35-bt



BOLLARD



POST100



TAPE-LED-5FT  
TAPE-LED-15FT  
TAPE-LED-30FT



SL65-LED



SL75-LED



SL85-LED



WS100



WS200



WS300



### Table of Contents

In-Ground Lights.....pgs 4-7  
 Ledge Lights.....pgs 8-11  
 Step Lights.....pgs 12-13  
 Bollard .....pgs 14-15  
 Tape Light.....pgs 16-17  
 Post Light.....pg 18  
 Wall Sconces.....pg 19

GL1xx Series Feature:

- Brass fixture, aged brass finish
- Clear convex lens
- Solid brass fixture base with two rubber gasket seals
- Solid brass faceplate with four screws
- Ceramic bi-pin socket
- Double wire lead pre-connected to the fixture, 16 awg (*UL listed*), brown
  - 25 foot wire lead, pre-stripped for easy wire connection
  - 18 inch wire lead, LED connection ready
- Lifetime warranty on fixture housing
- Available without a lamp

bt Fixture Features:

- Wattage: 2-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 350
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited color wheel options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

**GL-BASE**

3.5 in. (8.9 cm) Width at Base Top  
2.38 in. (6.0 cm) Width at Base Bottom  
3.5 in (8.9 cm) Tall

Shrouded Top



**GL100-bt**

*(Integrated Bluetooth Fixture)*

**GL100-LED6W**

*(6 watt MR16 LED lamp included)*

**GL100-LED5W**

*(5 watt MR16 LED lamp included)*

**GL100-LED4W**

*(4 watt MR16 LED lamp included)*

Flat Top



**GL150-bt**

*(Integrated Bluetooth Fixture)*

**GL150-LED6W**

*(6 watt MR16 LED lamp included)*

**GL150-LED5W**

*(5 watt MR16 LED lamp included)*

**GL150-LED4W**

*(4 watt MR16 LED lamp included)*

Grated Top



**GL160-bt**

*(Integrated Bluetooth Fixture)*

**GL160-LED6W**

*(6 watt MR16 LED lamp included)*

**GL160-LED5W**

*(5 watt MR16 LED lamp included)*

**GL160-LED4W**

*(4 watt MR16 LED lamp included)*

Opposing Sides Light Output



**GL170-bt**

*(Integrated Bluetooth Fixture)*

**GL170-LED6W**

*(6 watt MR16 LED lamp included)*

**GL170-LED5W**

*(5 watt MR16 LED lamp included)*

**GL170-LED4W**

*(4 watt MR16 LED lamp included)*

180° Light Output



**GL180-bt**

*(Integrated Bluetooth Fixture)*

**GL180-LED6W**

*(6 watt MR16 LED lamp included)*

**GL180-LED5W**

*(5 watt MR16 LED lamp included)*

**GL180-LED4W**

*(4 watt MR16 LED lamp included)*

360° Light Output



**GL190-bt**

*(Integrated Bluetooth Fixture)*

**GL190-LED6W**

*(6 watt MR16 LED lamp included)*

**GL190-LED5W**

*(5 watt MR16 LED lamp included)*

**GL190-LED4W**

*(4 watt MR16 LED lamp included)*

**GL300-BASE**

4.87 in. (12.3 cm) Width at Base Top  
 3.5 in. (8.9 cm) Width at Base Bottom  
 4.75 in. (12 cm) Base Height  
 0.5 in. (1.2 cm) Lip Height

**GL3xx Features:**

- Solid brass faceplate with four screws
- Clear glass lens
- Polycarbonate base with rubber gasket seal
- Ceramic bi-pin socket
- Swivel socket mount for angle adjustment
- 36" wire lead pre-connected to the fixture
- Lifetime warranty on fixture housing
- Available without a lamp

**bt Fixture Features:**

- Wattage: 2-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 450
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited color wheel options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

Flat Top



**GL300-bt**

*(Integrated Bluetooth Fixture)*

**GL300-LED6W**

*(6 watt MR16 LED lamp included)*

**GL300-LED5W**

*(5 watt MR16 LED lamp included)*

**GL300-LED4W**

*(4 watt MR16 LED lamp included)*

Shrouded Top



**GL350-bt**

*(Integrated Bluetooth Fixture)*

**GL350-LED6W**

*(6 watt MR16 LED lamp included)*

**GL350-LED5W**

*(5 watt MR16 LED lamp included)*

**GL350-LED4W**

*(4 watt MR16 LED lamp included)*

Domed Top



**GL310-bt**

*(Integrated Bluetooth Fixture)*

**GL310-LED6W**

*(6 watt MR16 LED lamp included)*

**GL310-LED5W**

*(5 watt MR16 LED lamp included)*

**GL310-LED4W**

*(4 watt MR16 LED lamp included)*

Grated Top



**GL360-bt**

*(Integrated Bluetooth Fixture)*

**GL360-LED6W**

*(6 watt MR16 LED lamp included)*

**GL360-LED5W**

*(5 watt MR16 LED lamp included)*

**GL360-LED4W**

*(4 watt MR16 LED lamp included)*

Opposing Sides Light Output



**GL370-bt**

*(Integrated Bluetooth Fixture)*

**GL370-LED6W**

*(6 watt MR16 LED lamp included)*

**GL370-LED5W**

*(5 watt MR16 LED lamp included)*

**GL370-LED4W**

*(4 watt MR16 LED lamp included)*

180° Light Output



**GL380-bt**

*(Integrated Bluetooth Fixture)*

**GL380-LED6W**

*(6 watt MR16 LED lamp included)*

**GL380-LED5W**

*(5 watt MR16 LED lamp included)*

**GL380-LED4W**

*(4 watt MR16 LED lamp included)*

360° Light Output



**GL390-bt**

*(Integrated Bluetooth Fixture)*

**GL390-LED6W**

*(6 watt MR16 LED lamp included)*

**GL390-LED5W**

*(5 watt MR16 LED lamp included)*

**GL390-LED4W**

*(4 watt MR16 LED lamp included)*

Features:

- Brass fixture, aged brass finish
- Mounting bracket, stainless steel, aged brass finish
- Optional frosted lens included
- 10' wire lead, 16 awg (UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- 10 Year warranty on LED components and fixture housing

Integrated LED strip:

- Beam Angle: 120°
- Beam Spread: Flood
- Color: Warm White
- Color Temperature: 2700K
- Operating Voltage: 10.8Vac - 15Vac
- CRI: Ra>80
- Rated Hours: 30,000
- Ambient Operating Temperature: -40°C ~ +85°C

**SL65-LED**

Integrated LED Step Light  
LED strip, 4 chips

- Watts: 1.1w
- Light Output: 110 lm (Lumens)
- Halogen Equivalent: 10w



4 in (10.1 cm) Wide  
3.5 in (8.9 cm) Deep

**SL75-LED**

Integrated LED Step Light  
LED strip, 8 chips

- Watts: 3w
- Light Output: 120 lm (Lumens)
- Halogen Equivalent: 20w




6.8 in (17.2 cm) Wide  
3.5 in (8.9 cm) Deep

**SL85-LED**

Integrated LED Step Light  
LED strip, 12 chips

- Watts: 4w
- Light Output: 370 lm (Lumens)
- Halogen Equivalent: 30w

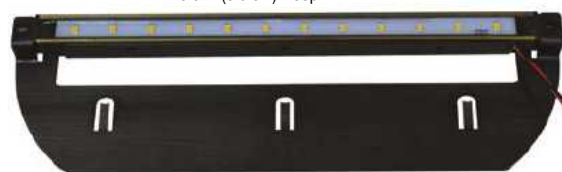

12 in (30.4 cm) Wide  
3.5 in (8.9 cm) Deep

## CHOOSE THE PERFECT SIZE

The 7" SL75-LED is our most popular and works for countless applications. The 4" SL65-LED will work great on shorter walls and corners. The 12" SL85-LED is ideal for taller walls and will provide a wider coverage area.



Glare shield included with every SL65-LED, SL75-LED and SL85-LED



Mounting bracket is removable for further applications. Optional frosted lens is included with the fixture.



SL65-LED with glare shield installed.

## LEDGE LIGHT INSTALLATION TIPS



Scan this QR Code to watch the installation video.


Use an existing joint to run the wire or use a grinder to create a new channel if needed



Be sure to leave slack at the front of the fixture in case a replacement is needed in the future.



Use the glare shield to reduce glare.

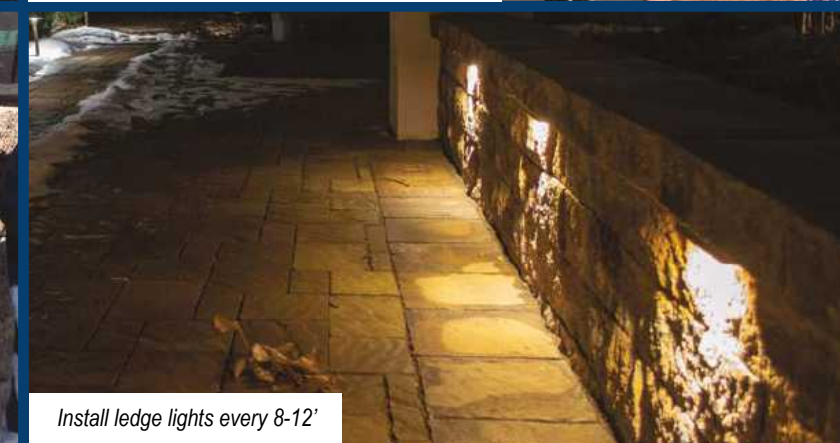

Install ledge lights every 8-12'

### SL50-bt

(Integrated Bluetooth Fixture)

### SL50-LED

(LBIPIN-LED-200lm lamp included)

Fixture Depth: 3.5 in. (8.9 cm)

Fixture Width: 5 in. (12.7 cm)

Lamp Housing Height: 1.5 in. (3.8 cm)

Lamp Housing Depth: 1.25 in. (3.1 cm)



#### Features:

- Brass fixture, aged brass finish
- Brass Mounting Plate (SL50-bt)
- Brass Surface Mount (SL60-bt)
- Frosted lens
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- 10 Year warranty on integrated LED

#### SL50-bt/SL60-bt Integrated LED:


- Wattage: 1-3
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 200
- Beam Spread: 120°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited color wheel options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

### SL60-bt

(Integrated Bluetooth Fixture)



For surface mounted applications.



SL100/SL150 Features:

- Brass fixture, aged brass finish
- Solid brass face plate with securing hex screws
- Allen wrench tool to tighten hex screws
- Base plate with adjustable mounting guides
- Ceramic bi-pin socket
- Frosted lens
- 25 Foot wire lead, 16 awg (*UL listed*), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Mounting hardware screws
- Two extra adjusting hex face plate screws
- Lifetime warranty on fixture housing
- Available without a lamp

**SL100-LED**

(LBIPIN-LED-200lm lamp included)

Fixture Depth: 1.75 in. (4.4 cm)  
 Fixture Diameter: 3.4 in. (8.6 cm)



Fits a Standard 4" Post

Front View


**SL150-LED**

(LBIPIN-LED-200lm lamp included)

Fixture Depth: 2 in. (5.0 cm)  
 Fixture Diameter: 3.875 in. (9.8 cm)



Side View

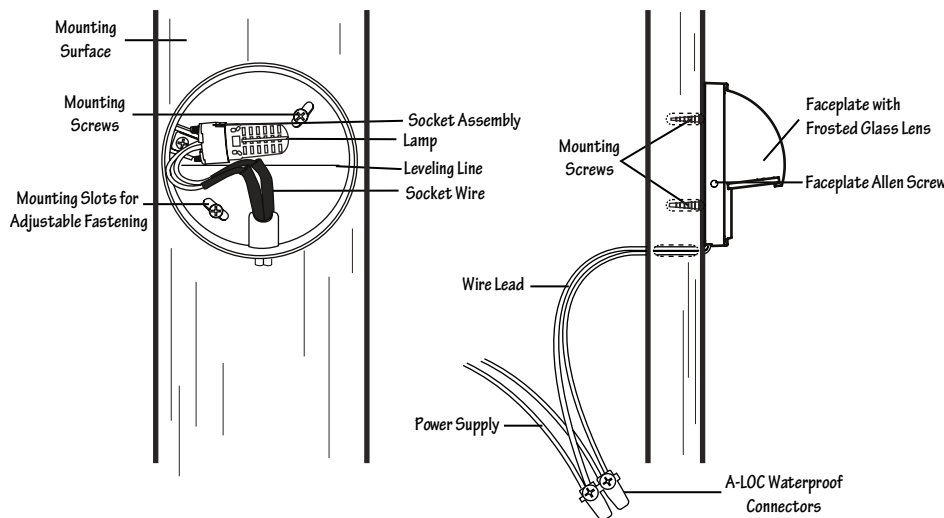

SL200 and SL300 Feature:

- Brass fixture, aged brass finish
- Solid brass face plate with securing screws
- Ceramic bi-pin socket
- 25 Foot wire lead, 16 awg (*UL listed*), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Optional metal set box included
- Lifetime warranty on fixture housing
- Available without a lamp

(Side View)



(Back View)



**SL200-LED**

(LBIPIN-LED-200lm lamp included)

**SL300-LED**

(Two LBIPIN-LED-200lm lamps included)

**SL25-bt**

**SL25-LED**

Integrated Surface Mount Step Light

6 in (15.2 cm) Wide  
 2.875 in (7.3 cm) Tall



Mounts directly onto desired surface

(Back View)



**SL35-bt**


**SL35-LED**

Integrated Surface Mount Step Light

9.5 in (24.1 cm) Wide  
 2.875 in (7.3 cm) Tall




(Side View)



SL25-LED/SL26-LED Features:

- Brass fixture, aged brass finish
- Solid brass louvered face plate with frosted lens (SL25-LED)
- Solid brass open face plate with frosted lens (SL26-LED)
- 25' Wire lead
- 10 Year warranty on LED components and fixture housing
- Integrated LED
  - Watts: 4.5w
  - Color: Warm White
  - Color Temperature: 2700K
  - Operating Voltage: 8Vac-15Vac
  - CRI: Ra>80
  - Halogen Equivalent: 20w
  - Rated Hours: 30,000 Hours
  - Ambient Operating Temperature: -40°C ~ +85°C

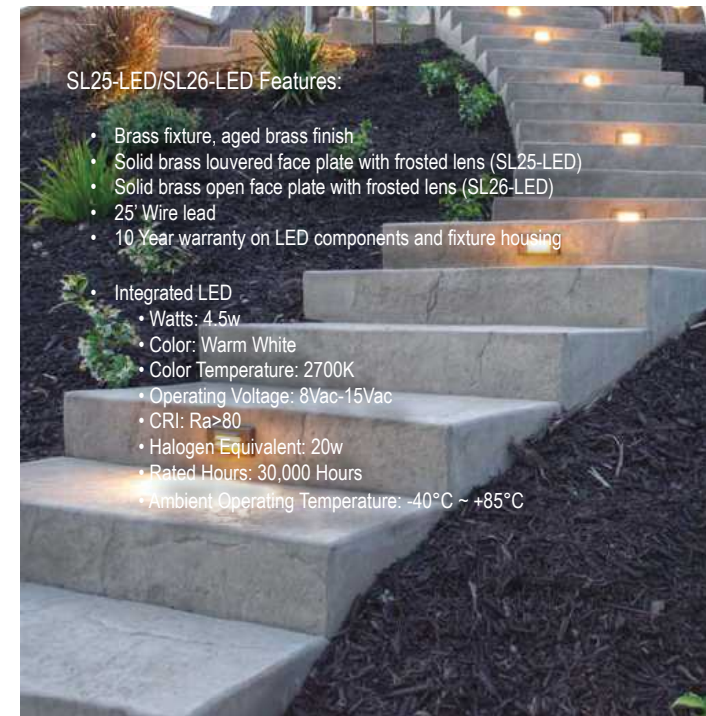

## **BOLLARD100-LED**

*(LBIPIN-LED-350lm lamp included)*

*Base Width: 5 in. (12.7 cm)*

*Total Height: 29.5 in. (74.9 cm)*

*Top Height: 7.5 in. (19.0 cm)*

*Top Width: 6 in. (15.2 cm)*



### **Bollard Features:**

- Solid brass three-tiered cover, aged brass finish
- Aluminum post, aged brass finish
- Clear and frosted polycarbonate lens with gaskets
- Ceramic bi-pin socket
- Aluminum mounting base with hardware
- 36 inch wire lead, 16 awg(UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Plastic ground stake (8.5 in; 21.6 cm length) (optional)
- Lifetime warranty on fixture housing
- Available without a lamp







**TAPE-LED-5FT**

Integrated LED Step Light  
Can be cut down to length  
LED strip, 5 Feet

- Watts: 5w
- Light Output: 350 lm (Lumens)

Per 1 Foot:

- Watts: 1w
- Light Output: 70 lm (Lumens)

**TAPE-LED-15FT**

Integrated LED Step Light  
Can be cut down to length  
LED strip, 15 Feet

- Watts: 15w
- Light Output: 1050 lm (Lumens)

Per 1 Foot:

- Watts: 1w
- Light Output: 70 lm (Lumens)

**TAPE-LED-15FT-LL**

Lower Lumen Output

- Watts: 8w
- Light Output: 675 lm (Lumens)

Per 1 Foot:

- Watts: 0.5w
- Light Output: 45 lm (Lumens)

**TAPE-LED-30FT**

Integrated LED Step Light  
Can be cut down to length  
LED strip, 30 Feet

- Watts: 30w
- Light Output: 2,100 lm (Lumens)

Per 1 Foot:

- Watts: 1w
- Light Output: 70 lm (Lumens)

**TAPE-SLV-3** *(Accessory sold separately)*

- Aluminum channel with polycarbonate frosted lens
- Silver finish



Length: 39.37in (1m)  
Width: .59 in. (1.5 cm)  
Height: .27 in. (.7 cm)

TAPE-LED Features:

- 5 Foot LED strip
- Mounting clips included
- 10' wire lead, 16 awg (UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- 10 Year warranty on LED components and fixture housing

LED strip

- Beam Angle: 120°
- Beam Spread: Flood
- Color: Warm White
- Color Temperature: 2700K
- Operating Voltage: 10.8Vac - 15Vac
- CRI: Ra>80
- Rated Hours: 30,000
- Ambient Operating Temperature: -40°C ~ +85°C



**POST100-LED6W**  
(6 watt MR16 LED lamps included)

**POST100-LED5W**  
(5 watt MR16 LED lamps included)

**POST100-LED4W**  
(4 watt MR16 LED lamps included)  
Body Width: 7.75 in. (19.7 cm)  
Body Depth: 7.75 in. (19.7 cm)  
Total Height: 12 in. (30.5 cm)  
Hat Width: 11 in. (27.9 cm)

Post Light Features:

- Brass post light, aged brass finish
- Frosted lens panels
- Ceramic bi-pin socket
- Mounting hardware
- 25 foot wire lead, 16 awg(UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- Available without a lamp

Wall Sconces Feature:

- Brass fixture, aged brass finish
- Frosted top lens (WS100 and WS200)
- Clear glass top and bottom lenses (WS300)
- Dual Ceramic bi-pin socket
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- Available without a lamp



**WS100-LED**  
(Two LBIPIN-LED-200lm lamps included)  
Fixture Height: 6 in. (15.2 cm)  
Fixture Width: 3 in. (7.6 cm)  
Fixture Depth: 2 in. (5.0 cm)



**WS200-LED**  
(Two LBIPIN-LED-200lm lamps included)  
Fixture Height: 9 in. (22.8 cm)  
Fixture Width: 6 in. (15.2 cm)  
Fixture Depth: 3.5 in. (8.9 cm)



**WS300-LED6W**  
(Two 6 watt MR16 LED lamps included)

**WS300-LED5W**  
(Two 5 watt MR16 LED lamps included)

**WS300-LED4W**  
(Two 4 watt MR16 LED lamps included)  
Fixture Height: 8 in. (20.3 cm)  
Fixture Width: 2.25 in. (5.7 cm)  
Fixture Depth: 3.5 in. (8.9 cm)



[www.allianceoutdoorlighting.com](http://www.allianceoutdoorlighting.com)